
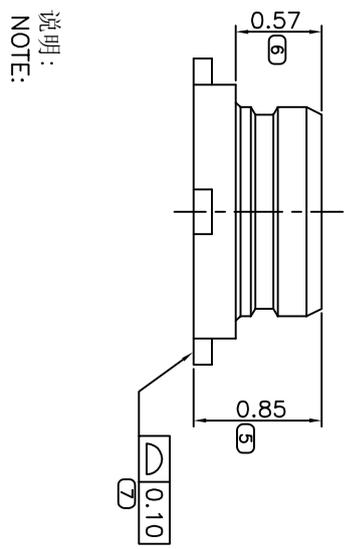
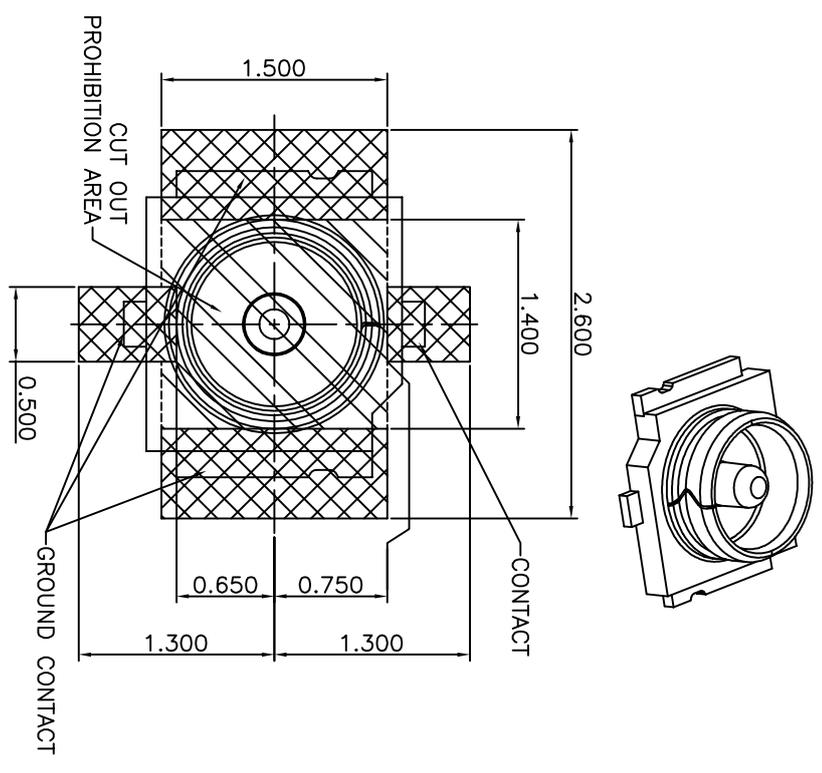



REV	ECN NO	DESCRIPTION	DATE	APPD
A		NEW RELEASE	2016.07.21	曾庆勇
B		10020032料号更新19.006A0-0001R0	2017.10.25	曾庆勇

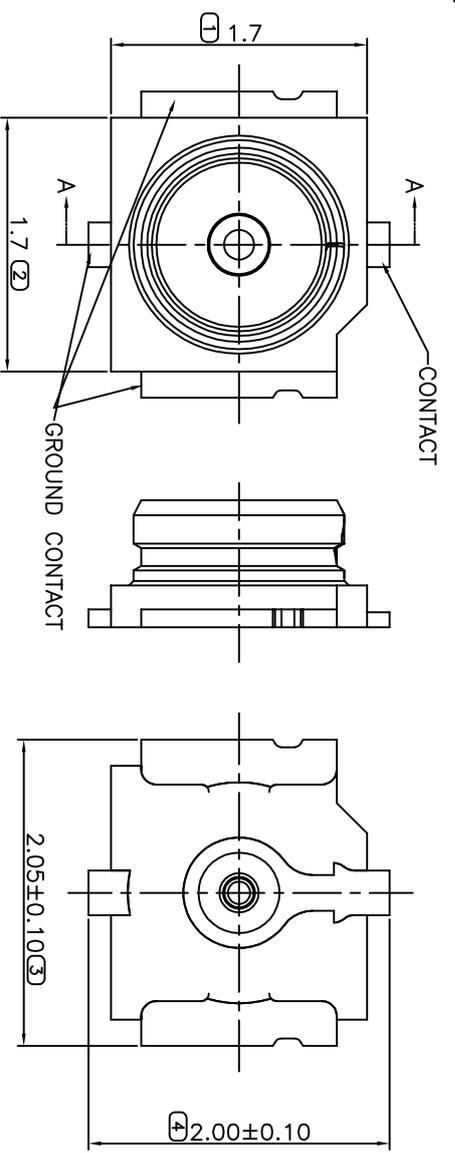

SECTION: A-A
SCALE: 1:1

1. 塑胶材料: 热塑性塑胶, 黑色, UL 94V-0;
HOUSING MATERIAL: THERMOPLASTIC, WHITE, UL 94V-0;
端子材料: 铜合金, 接触点镀金;
CONTACT MATERIAL: COPPER ALLOY, GOLD PLATED ALL OVER;
外壳材料: 铜合金, 接触点镀金;
SHELL MATERIAL: COPPER ALLOY, GOLD PLATED ALL OVER;

2. 产品性能:
PERFORMANCE:

- 2.1. 接触阻抗: 20mΩ Max.
CONTACT RESISTANCE: 20mOHM Max.
- 2.2. 耐电压: 200V AC, 1 Minute;
DIELECTRIC WITHSTANDING VOLTAGE: 200V AC FOR 1MINUTE;
- 2.3. 绝缘阻抗: 500MΩ Min.
INSULATION RESISTANCE: 500MOHM Min.

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE±0.05

EXTEND	USE	TITLE		DWC NO	BONWORLD
		UNIT	MATERIAL		
RF3 BOARD	CONN	mm	RF3 PLUG CONN CUSTOMER DWG	C-19.006A0	
GENERAL TOLERANCE	ANGLES				
DIMENTION					
0.	±0.15	0.	±3.0°		
.0	±0.10	.0	±2.0°		
.00	±0.05	.00	±1.0°		
.000	±0.03				
		QTY	CHD	P/N:	
		FINISHED	DRN	19.006A0-0001R0	
				2017.10.25	
				2017.10.25	
				2017.10.25	
				1/1	
				SCALE	
				1:1	
				REV	
				B	